

Distributed by:

**JAMECO**<sup>®</sup>  
ELECTRONICS

**www.Jameco.com ♦ 1-800-831-4242**


The content and copyrights of the attached  
material are the property of its owner.

Jameco Part Number 172937

# NAIS

## ULTRA-MINIATURE PC BOARD TYPE POWER RELAY

# JS RELAYS



mm inch

### FEATURES

- Ultra-miniature size with universal terminal footprint
- High contact capacity: 10 A
- Class B coil insulation type available
- TV-5 type available
  - 1 Form A type → TV-5
  - 1 Form C type → TV-5 (N.O. side only)
- VDE, TÜV also approved
- Sealed construction for automatic cleaning

### SPECIFICATIONS

#### Contact

Arrangement	1 Form A, 1 Form C	
Initial contact resistance, max. (By voltage drop 6 V DC 1 A)	100 mΩ	
Contact material	Silver alloy	
Rating (resistive load)	Nominal switching capacity	10 A 250 V AC 10 A 125 V AC 6 A 277 V AC
	Max. switching power	2,500 VA
	Max. switching voltage	250 V AC, 100 V DC
	Max. switching current	10 A (AC), 5 A (DC)
Expected life (min.ope.)	Mechanical (at 180 cpm)	10 <sup>7</sup>
	Electrical at 10 A 125 V AC, 6 A 277 V AC resistive (at 20 cpm)	10 <sup>5</sup>
	10 A 250 V AC resistive (at 20 cpm)	5 × 10 <sup>4</sup> (No contact only)

#### Coil

Nominal operating power	360 mW
-------------------------	--------

#### Remarks

- \* Specifications will vary with foreign standards certification ratings.
- \*<sup>1</sup> Detection current: 10mA
- \*<sup>2</sup> Excluding contact bounce time
- \*<sup>3</sup> Half-wave pulse of sine wave: 11ms; detection time: 10μs
- \*<sup>4</sup> Half-wave pulse of sine wave: 6ms
- \*<sup>5</sup> Detection time: 10μs
- \*<sup>6</sup> Refer to 5. Conditions for operation, transport and storage mentioned in AMBIENT ENVIRONMENT (Page 24).
- \*<sup>7</sup> When using relays in a high ambient temperature, consider the pick-up voltage rise due to the high temperature (a rise of approx. 0.4% V for each 1°C 33.8°F with 20°C 68°F as a reference) and use a coil impressed voltage that is within the maximum allowable voltage range.


#### Characteristics

Max. operating speed	20 cpm	
Initial insulation resistance	Min. 100 MΩ (at 500 V DC)	
Initial breakdown voltage* <sup>1</sup>	Between open contacts	750 Vrms for 1 min.
	Between contacts and coil	1,500 Vrms for 1 min.
Operate time* <sup>2</sup> (at nominal voltage)	Approx. 10 ms	
Release time(without diode)* <sup>2</sup> (at nominal voltage)	Approx. 10 ms	
Temperature rise (at nominal voltage)	Max. 35°C	
Shock resistance	Functional* <sup>3</sup>	Min. 98 m/s <sup>2</sup> {10 G}
	Destructive* <sup>4</sup>	Min. 980 m/s <sup>2</sup> {100 G}
Vibration resistance	Functional* <sup>5</sup>	Approx. 98 m/s <sup>2</sup> {10 G}, 10 to 55 Hz at double amplitude of 1.6 mm
	Destructive	Approx. 117.6 m/s <sup>2</sup> {12 G}, 10 to 55 Hz at double amplitude of 2 mm
Conditions for operation, transport and storage* <sup>6</sup> (Not freezing and condensing at low temperature)	Ambient temp.* <sup>7</sup>	-40°C to +85°C -40°F to +185°F
	Humidity	5 to 85% R.H.
Unit weight	Approx. 12 g .423 oz	

### TYPICAL APPLICATIONS

1. Home appliances  
Air conditioner, heater, etc.
2. Automotive  
Power-window, car antenna, door-lock, etc.
3. Office machines  
PPC, facsimile, etc.
4. Vending machines

# ORDERING INFORMATION



Contact arrangement	Protective construction	Coil insulation class	Coil voltage (DC)
1: 1 Form C 1a: 1 Form A	Nil: Sealed type F: Flux-resistant type	Nil: Class E insulation B: Class B insulation	5, 6, 9, 12, 18, 24, 48 V

UL/CSA, VDE, TÜV approved type is standard.

Notes: 1. Standard packing: Carton: 100 pcs. Case: 500 pcs.



2. When ordering TV rated (TV-5) types, add suffix -TV.

# COIL DATA

Part No.				Nominal voltage, V DC	Pick-up voltage, V DC (max.) (at 20°C/68°F)	Drop-out voltage, V DC (min.) (at 20°C/68°F)	Coil resistance, Ω (±10%) (at 20°C/68°F)	Nominal operating current, mA (±10%) (at 20°C/68°F)	Nominal operating power, mW (at 20°C/68°F)	Max. allowable voltage (at 85°C/185°F)
Sealed type		Flux-resistant type								
1 Form A	1 Form C	1 Form A	1 Form C							
JS1a-5V	JS1-5V	JS1aF-5V	JS1F-5V	5	3.5	0.5	69.4	72	360	130%V of nominal voltage
JS1a-6V	JS1-6V	JS1aF-6V	JS1F-6V	6	4.2	0.6	100	60		
JS1a-9V	JS1-9V	JS1aF-9V	JS1F-9V	9	6.3	0.9	225	40		
JS1a-12V	JS1-12V	JS1aF-12V	JS1F-12V	12	8.4	1.2	400	30		
JS1a-18V	JS1-18V	JS1aF-18V	JS1F-18V	18	12.6	1.8	900	20		
JS1a-24V	JS1-24V	JS1aF-24V	JS1F-24V	24	16.8	2.4	1,600	15		
JS1a-48V	JS1-48V	JS1aF-48V	JS1F-48V	48	33.6	4.8	6,400	7.5		


# DIMENSIONS

mm inch




Note: Terminal No. 4 is only for 1 Form C type  
General tolerance: ±0.3 ±.012

## Schematic (Bottom view)




## PC board pattern (Copper-side view)

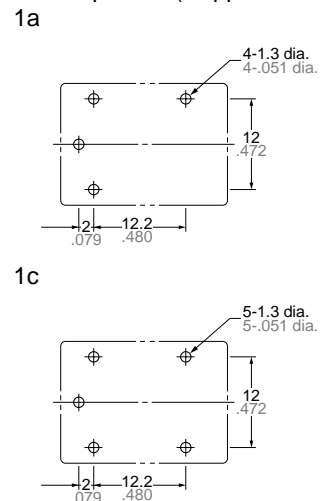

Tolerance: ±0.1 ±.004


REFERENCE DATA

1. Maximum value for switching capacity

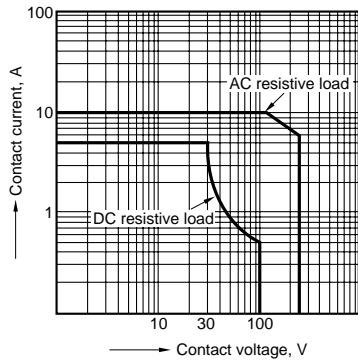


2. Operate/release time

Sample: 25 pcs., JS1-12V

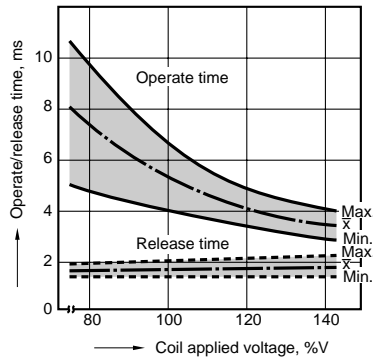

3. Life curve


Ambient temperature: Room temperature

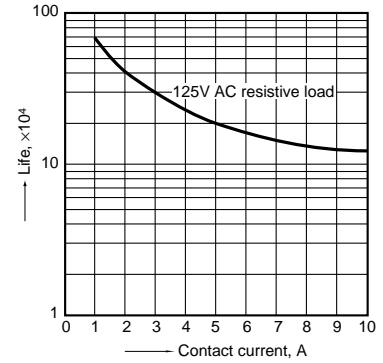

4-(1). Coil temperature rise

Sample: 5 pcs., JS1a-24V


Measured portion: Inside the coil  
Contact current: 5 A

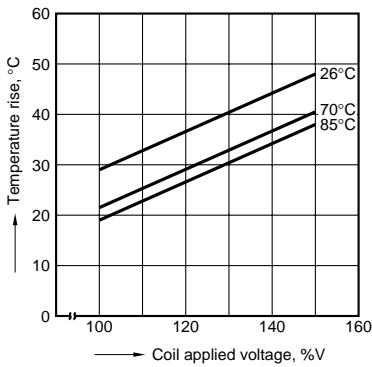

4-(2). Coil temperature rise


Sample: 5 pcs., JS1a-24V

Measured portion: Inside the coil  
Contact current: 10 A

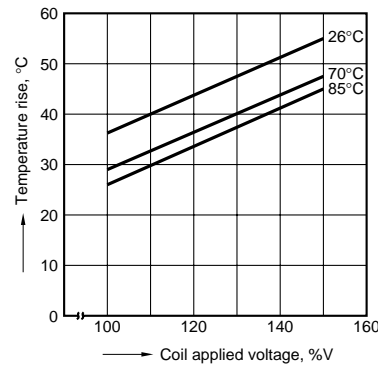

5. Ambient temperature characteristics

Sample: 6 pcs., JS1-12V



6. Electrical life test


(10 A 125 V AC, resistive load)

Sample: 6 pcs., JS1-12V


Operating speed: 20 cpm

Ambient temperature: room temperature


(Circuit)

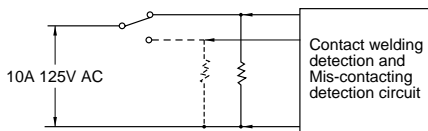

Change of pick-up and drop-out voltage

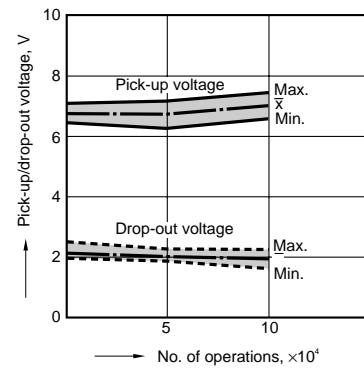

Change of contact resistance

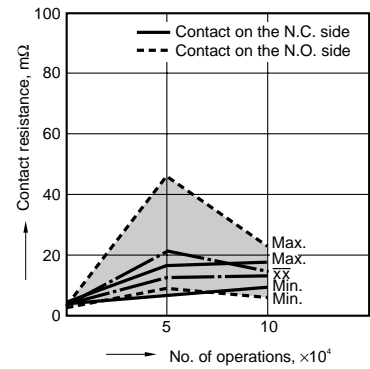

For Cautions for Use, see Relay Technical Information (Page 11 to 39).